

尼龙多孔防水电缆接头

HSK-D Nylon Cable Glands Special For RW

材料: 尼龙

密封件材料: 三元乙丙

温度范围: $-40^{\circ}\text{C} \sim 100^{\circ}\text{C}$

防护等级: 在合适的线缆范围之内, 并使用O型圈, 防护等级可以达到IP68

颜色: 黑色BL (RL9005)、深灰色GR (RL7037)、灰白色GL (RAL7035)



Material: Nylon

Seal: EPDM

Temperature: $-40^{\circ}\text{C} \sim 100^{\circ}\text{C}$

Protection level: within the appropriate cable range and with O-ring, protection level can reach IP68

Color: Black(RL9005)、Deep Gray (RL7037)、Gray White(RAL7035)

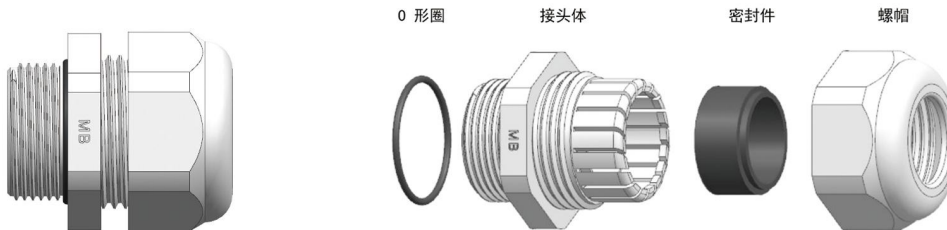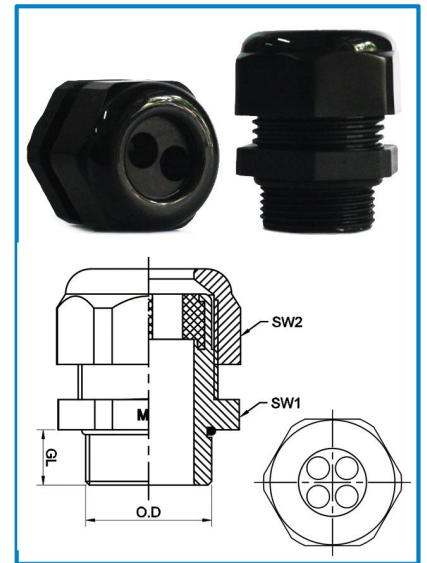

HSK-D系列 M制螺纹尼龙电缆接头

MB产品编号 MB article NO.	规格型号 Specification	螺纹规格 Thread Size	卡口范围 Cable range mm	螺纹 外径 OD mm	螺纹 长度 GL mm	扳手尺寸 SW1/SW2 mm	包装单位 Packet Units
7.13.000001	HSK-D-M20X1.5(2X5)	M20X1.5	2X5	20	9	24/24	50
7.13.000003	HSK-D-M25X1.5(2X7)	M25X1.5	2X7	25	11	33/33	50
7.13.000005	HSK-D-M25X1.5(3X7)	M25X1.5	3X7	25	11	33/33	50
7.13.000007	HSK-D-M25X1.5(4X6)	M25X1.5	4X6	25	11	33/33	50
7.13.000009	HSK-D-M25X1.5(2X8)	M25X1.5	2X8	25	11	33/33	50
7.13.000011	HSK-D-M32X1.5(6X6)	M32X1.5	6X6	32	11	42/42	25
7.13.000013	HSK-D-M32X1.5(4X9)	M32X1.5	4X9	32	11	42/42	25
7.13.000015	HSK-D-M32X1.5(2X8.5)	M32X1.5	2X8.5	32	11	42/42	25
7.13.000017	HSK-D-M40X1.5(2X15)	M40X1.5	2X15	40	13	52/52	10
7.13.000019	HSK-D-M40X1.5(9X7)	M40X1.5	9X7	40	13	52/52	10
7.13.000021	HSK-D-M50X1.5(4X13)	M50X1.5	4X13	50	14	60/60	5